



product details

**QTP-M 1X26-42**

Product description: QTP-M 1X26-42  
 EAN/ Product: 4008321329134  
 Quantity: Unpacked (UNV) contains 1 Piece (PCE)

You can find this product in the eCatalog:

[http://catalog.myosram.com?~language=EN&~country=US&it\\_p=4008321329134](http://catalog.myosram.com?~language=EN&~country=US&it_p=4008321329134)

Applications	
Lamp start	preheat start within 1 s
IP code	IP20

General Description	
Energy Label - EEI	A2
Design / version	ECG multiwatt
EEI not for contr. gear	A2
Standards	acc. to EN 61347-2-3   acc. to EN 60929   acc. to EN 55015:2006 + A1:2007   acc. to EN 61000-3-2   acc. to EN 61547

Logistical Data	
Product weight	135 g

Technical - Electrical Data	
Mains current max.	0.2 A
Nominal voltage	220-240 V
Mains frequency	50-60 Hz
DC voltage	176...276 V
Operating frequency	≈ 47 kHz
Output voltage	430 V
Dielectric strength	300 V - permanent/320 V - 48 h/350 V - 2h V
Max. no. of ECGs on circuit breaker 10A	17
Max. no. of ECGs on circuit breaker 16A	28
TH full width at half maximum	210 µs

Technical - Geometries	
Length	103 mm
Width	67 mm
Height	31 mm
Mounting hole spacing, length	110 mm
Mounting hole spacing, width	57 mm

Technical - Temperatures	
Ambient temperature range	-10...+50 °C
Max. operating temp. at the Tc point	70 °C
Max. casing temp. in case of fault	75 °C
Relative humidity	5...85 % <sup>1)</sup>
Storage temperature	-40...85 °C

Packaging units				
EAN	Packaging type and content	Dimensions in h x w x l	Gross weight	Volume
4008321329134	Unpacked contains 1 Piece	64,000 mm x 30,000 mm x 103,000 mm	135,000 g (0,000 g)	0,185 Cubic dec.



09.06.2010

Subject to change without notice. Errors and omission excepted.

© 2010 OSRAM GmbH

Page 1 from 4



product details


## QTP-M 1X26-42

Packaging units				
EAN	Packaging type and content	Dimensions in h x w x l	Gross weight	Volume
4008321329141	Shipping carton box contains 20 Piece	230,000 mm x 100,000 mm x 360,000 mm	2.986,000 g (0,000 g)	8,280 Cubic dec.

<sup>1)</sup> max. 56 d/y at 85%




## Lamp wiring

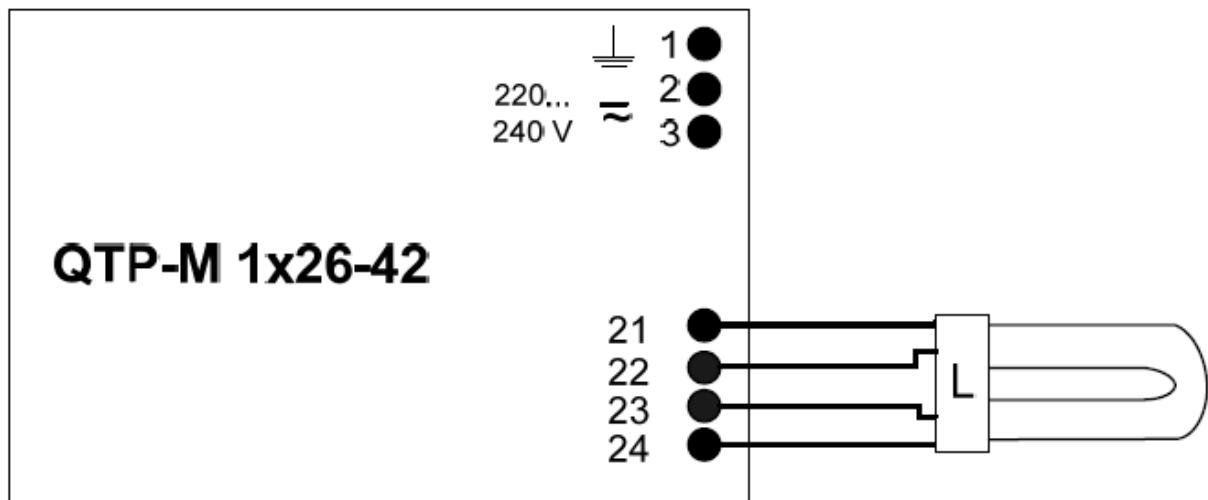

Max. permitted cable length in between ECG and lamp: 2.0 m (PIN 21; 22); 1.0 m (PIN 23; 24)



**Lamp wiring:**

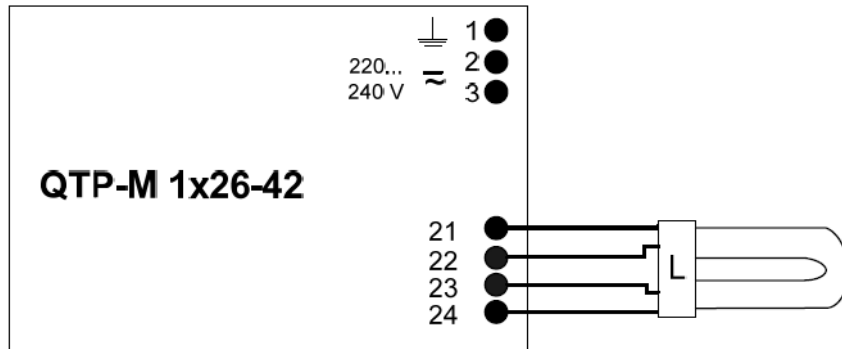

Max. permitted cable length in between ECG and lamp: 2.0 m (PIN 21; 22); 1.0 m (PIN 23; 24)